

ADDENDUM #02

Lindhout Associates architects aia pc
10465 citation drive, brighton, michigan 48116

www.lindhout.com

810-227-5668 (fax) 810-227-5855



209 N John St., Highland Twp., MI 48357

COMM. NO. 26044

ADDENDUM NO. 02

DATE: September 10, 2026

ATTN: Bidding General Contractors

It is understood and accepted that the work of this Addendum shall supplement and form a part of the original Specifications, Drawings, General Conditions, Special Conditions, Instructions to Bidders, and any and all stipulations thereof.

This Addendum is issued prior to the receipt of bids and the intent thereof is to record and insert certain changes, additions, and clarifications of the contract documents. All items shall be considered in connection with the various Contractors' Proposals.

CONTENTS

This Addendum contains the accompanying three pages & revised drawing sheet A3 and no other drawings or information not specifically included.

NO. DESCRIPTION

- | | |
|----|---|
| 01 | CLARIFICATION: Wall section titling has been revised for views 1/A3 and 3/A3 to align with project intent. |
| 02 | CHANGE: UL design number has been corrected for the rated ceiling assembly at view 2/A3. |
| 03 | CLARIFICATION: UL design number rated wall and ceiling assembly construction requirements clarified via. manufacturer data sheets from National Gypsum pertaining to U305 and I504. Refer to the following two pages. |

ADDENDUM #02

Lindhout Associates architects aia pc
10465 citation drive, brighton, michigan 48116


www.lindhout.com

810-227-5668 (fax) 810-227-5855



209 N John St., Highland Twp., MI 48357

COMM. NO. 26044

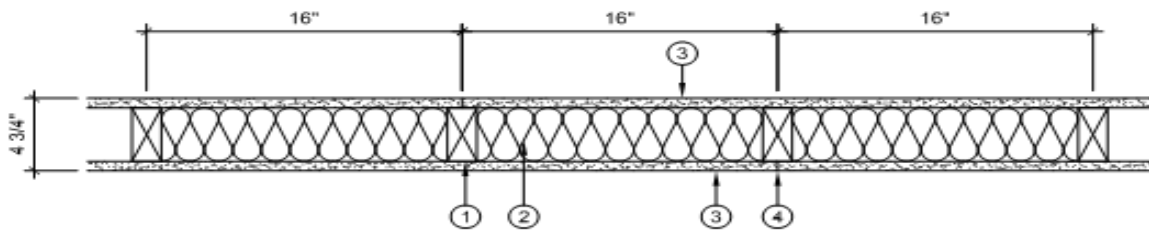

1. MIN. 2x4 WOOD STUDS 16" O.C.
2. 3-1/2" GLASS FIBER INSULATION
3. 5/8" GOLD BOND FIRE-SHIELD GYPSUM BOARD (FSW, FSW-6, FSK) APPLIED VERTICALLY OR HORIZONTALLY AND FASTENED WITH 1-7/8" 6d NAILS 7" O.C. OR 1-1/4" TYPE W SCREWS 8" O.C. VERTICAL JOINTS CENTERED OVER STUDS AND STAGGERED 16" FROM OPPOSITE SIDE.
4. JOINT TAPE AND COMPOUND OVER JOINTS AND FASTENER HEADS (OPTIONAL WHEN SQUARE EDGE BOARD IS USED)

STC 36 - 2x4 WOOD STUDS

SOUND TEST: NGC 2008029

DATE: 06/01/2026

UL DESIGN: U305

National
Gypsum

SCALE: 1-1/2"=1'-0"

LOADBEARING WOOD STUD PARTITION - 1 HOUR

© 2026 National Gypsum Services Company

ADDENDUM #02

Lindhout Associates architects aia pc
10465 citation drive, brighton, michigan 48116


www.lindhout.com

810-227-5668 (fax) 810-227-5855



209 N John St., Highland Twp., MI 48357

COMM. NO. 26044

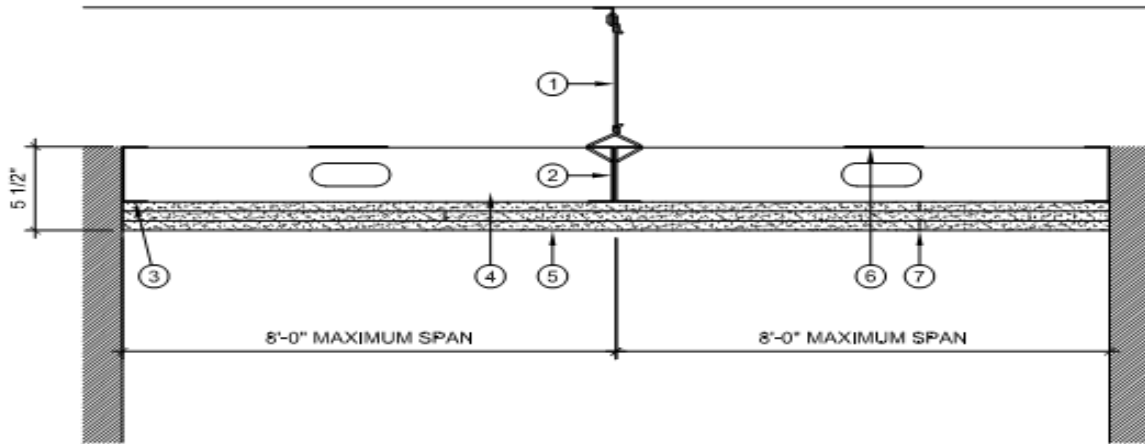

1. MIN. 8 GAUGE HANGER WIRE 24" O.C.
2. MIN. 3-5/8" 20 GAUGE C-TRACKS FASTENED BACK TO BACK WITH 1/2" TYPE S SCREWS SPACED 24 O.C. ALONG CENTERLINE. BUTT JOINTS STAGGERED 12" AND FASTENED WITH TWO SCREWS, TOP AND BOTTOM, ON EACH SIDE OF BUTT JOINT
3. MIN. 3-5/8" 20 GAUGE C-TRACKS FASTENED TO FIRE-RATED SUPPORTING STRUCTURE WITH FASTENERS SPACED MAX. 24 O.C. ALONG TOP AND BOTTOM OF VERTICAL LEG
4. MIN. 20 GAUGE 3-5/8" STEEL STUDS 16" O.C. FASTENED TO TOP AND BOTTOM LEG OF C-TRACKS WITH 3/8" PAN-HEAD SCREWS
5. THREE LAYERS 5/8" FIRE-SHIELD GYPSUM BOARD (FSW, FSW-6) APPLIED PERPENDICULAR TO STUDS. BASE LAYER FASTENED TO STUDS AND TRACKS WITH 1" TYPE S SCREWS 16" O.C. SECOND LAYER FASTENED WITH 1-5/8" SCREWS 16" O.C. FACE LAYER FASTENED WITH 2-1/4" SCREWS 12" O.C. JOINTS STAGGERED MIN. 16" FROM ADJACENT LAYERS
6. MIN. 20 GAUGE 4" STEEL STRAP LOCATED AT CENTER SPAN AND FASTENED TO EACH STUD WITH ONE 3/8" PAN-HEAD SCREW. STRAPS OVERLAPPED ONE STUD BAY AT SPLICE LOCATIONS
7. JOINT TAPE AND COMPOUND OVER JOINTS AND FASTENER HEADS (OPTIONAL)

DATE: 06/01/2026

UL DESIGN: I504, GA FILE: HM 7101

**National
Gypsum**

SCALE: 1-1/2"=1'-0"

1 HOUR STEEL STUD CEILING ASSEMBLY

© 2026 National Gypsum Services Company

END OF ADDENDUM